

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[FR803B](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant

HAKKOFR-801FR-802FR-803B

For lead-free soldering with sufficiently high power HAKKO hot air lineup allows easier thermal control.



HAKKOFR-801

The air outlet is provided with new mechanism to reduce the temperature irregularity in hot air.

- The air outlet is provided with a new mechanism to reduce the temperature irregularity. Supplies hot air at a stable temperature.
- Comes with an airflow meter to allow more accurate and easier control of flow rate.



HAKKOFR-802

The digital thermal display allows easier temperature control.

- Comes with the offset function to compensate for difference of air outlet temperatures depending on the nozzle size.
- The power saving function (30 min./60 min./∞ can be selected) will automatically stop the hot airflow after a specific time passes.
- Comes with the auto cool-down function. If the power is turned off and then continues to supply air until the temperature in the nozzle pipe decreases down to 100°C to protect the heating element.
- Card lock function to lock the setting details.




HAKKOFR-803B

Preheating, main heating and cooling down 50 memories/3 steps temperature profile can be set.

- For more effective rework operation, it can be interfaced to the HAKKO FR-820.
- The heating conditions can be recreated due to the sensor feedback temperature control. 50 memories/3 steps temperature profile can be set, allowing easier control for temperature, flow rate and time. Highly accurate job can be standardized.
- The power saving function (30 min/60 min/∞ can be selected) will automatically stop the hot airflow after a specific time passes.
- Comes with an offset function.

3 steps Temperature Profile

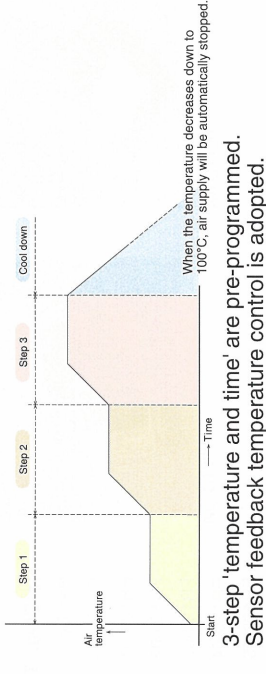

Performance comparison table

	FR-801	FR-802	FR-803B
Basic Ability	- The air outlet is provided with new mechanism. - Comes with an airflow meter. - Space-saving design - ESD safe by design		
Digital Function	- Offset function - Auto cool-down function - Power-saving design - Card-lock function		
Ideal Function	3-step temperature profile can be set. - Comes with a vacuum pipe.		

Specifications

Model No.	FR-801	FR-802	FR-803B
Power Consumption	100V-310W, 110V-360W, 120V-430W, 220V-570W, 230V-630W, 240V-680W		
Station			
Model No.	FR-801	FR-802	FR-803B
Power Consumption	30W (Stand-by power consumption 100-120V 4W, 220-240V 7W)	30W (Stand-by power consumption 100-120V 4W, 220-240V 4W)	
Capacity (Air blow)		5-20 L/min. (Max.)	
Temperature Range	100-500°C (Use A1130)	100-500°C (Sensor)	
Modes	-	-	Manual/Auto
Timer	-	-	50 memories/3 steps temperature profile
Dimensions		160(W) x 145(H) x 230(D)mm	
Weight (w/o cord)	4kg	4.3kg	5kg
Handpiece			
Power Consumption	100V-280W, 110V-330W, 120V-400W, 220V-540W, 230V-600W, 240V-650W		
Total Length (w/o hose)	185(L)mm	200(L)mm	
Weight (w/o hose)	115g	200g	

Packing List

Model Name	Contents
HAKKO FR-801	Station1 Handpiece1 Power cord1 Handpiece holder1 FP pick-up1 FP pick-up wire (S)1 FP pick-up wire (L)1
HAKKO FR-802	Station1 Handpiece1 Power cord1 Handpiece holder1 Control card1 FP pick-up1 FP pick-up wire (S)1 FP pick-up wire (L)1
HAKKO FR-803B	Station1 Handpiece1 Power cord1 Handpiece holder1 Control card1 Vacuum pipe control knob (L)1 Pad (ø3mm)2 Pad (ø5mm)2 Pad (ø7.6mm)2

* Nozzle is an optional part.

Optional Nozzles

Please refer to page 50, 51.

SMD-BGA Repair System



Combination of HAKKO FR-803B and FR-820 allows the SMD and BGA rework equipment to set up at a lower price.

* For further details, refer to page 52.

Temperature Probe

Part No.	Name/Description
C1541	Temperature probe for hot air



For measuring the temperature of hot air.

* For further details, refer to page 37.

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[FR803B](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant