


TES

Reliable in Quality

TES-1600 Digital Insulation Tester

- 2000 M Ω / 1000 V, 200 M Ω / 500 V, 200 M Ω / 250 V
- Power lock for 3 minutes (Auto Power off)
- Data-Hold-Function / Continuity Beeper

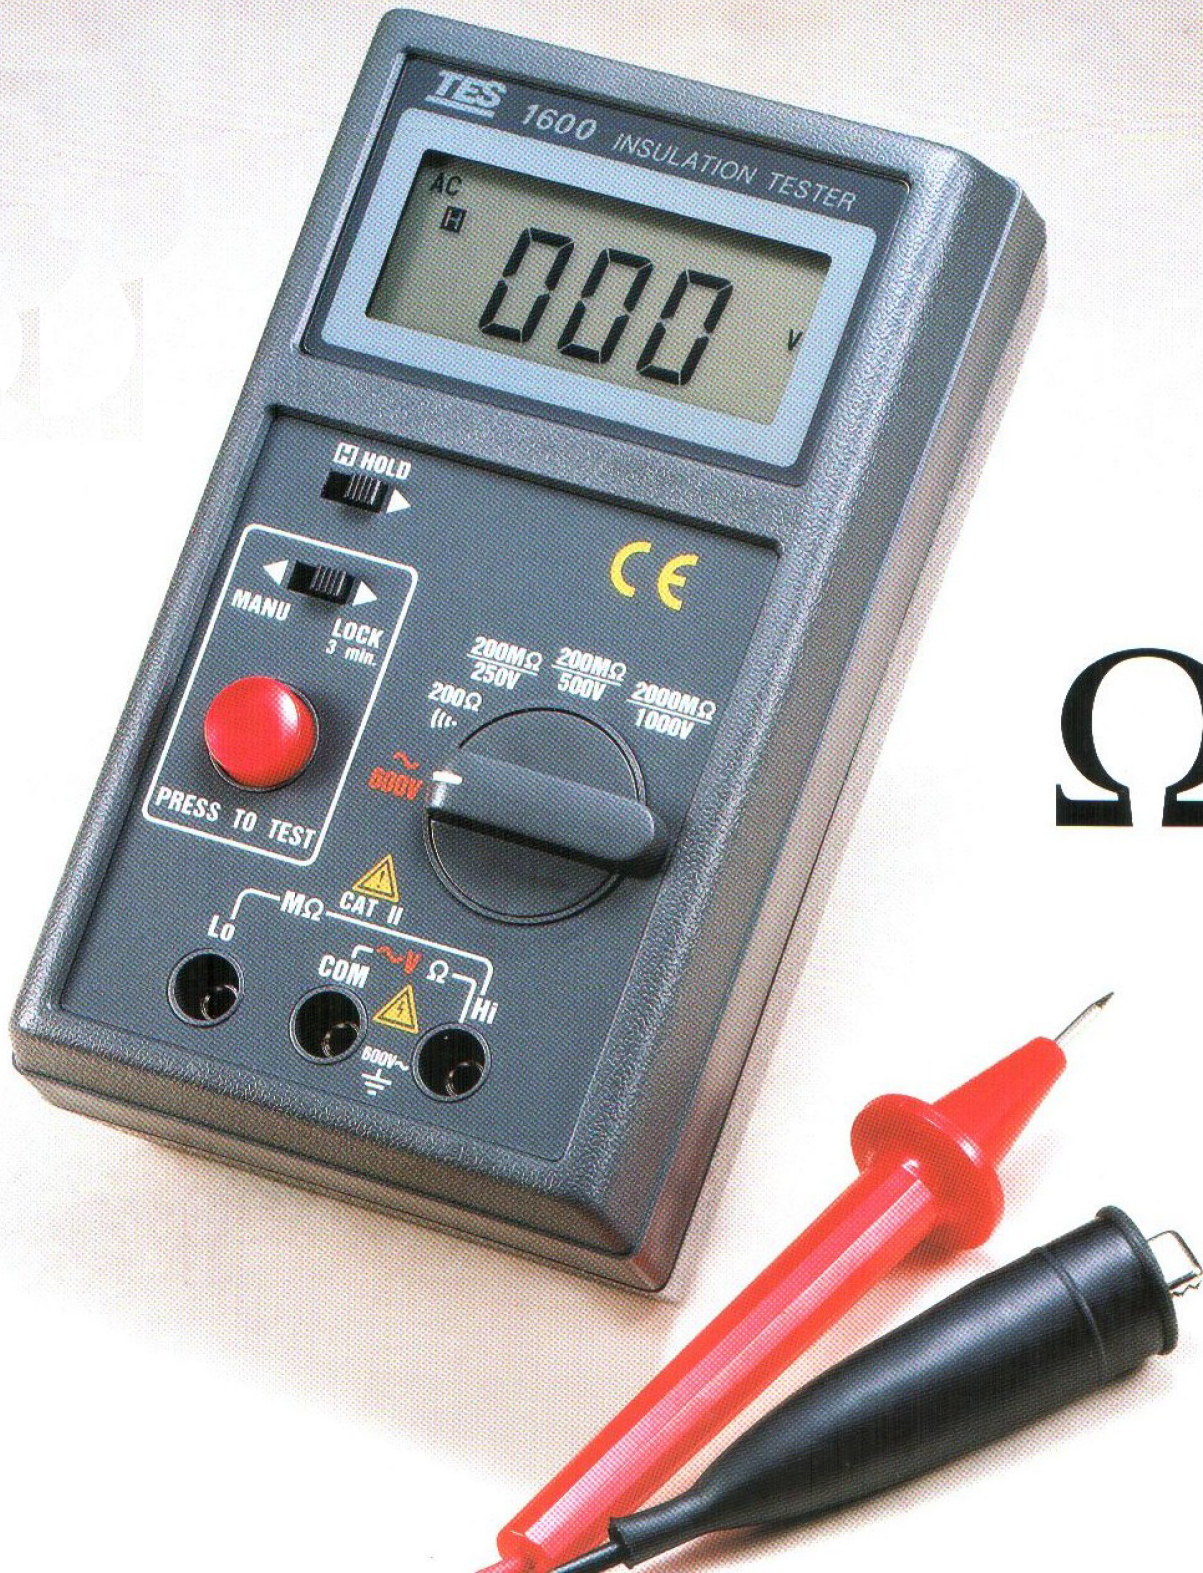

Ω

TES-1600 Digital Insulation Tester

FEATURE:

- Digital readout easy to obtain by 0.65" LCD display
- Automatic unit & sign annunciator
- Rotary switch easy for range selection
- Power-lock switch (3 minutes) simplifies the measurement
- Continuity beeper
- Battery operated/Overload Protection
- Safety test leads
- 1mA test current

GENERAL SPECIFICATIONS:

Display	3.5 digit 0.65" large LCD
Sampling rate (A/D)	2.5 time/sec
Zero adjustment	Automatically
Operating temp. & Storage Environment	0°C~40°C < 80% R.H. -10°C to 60°C < 70% R.H.
Power source	6 'AA' 1.5V batteries
Dimension	165(L)x100(W)x57(H) mm
Weight	500g
Accessories	Test leads, 6pcs. of battery, carrying case and manual

MEG OHMS

Range	Resolution	Accuracy	Terminal Voltage	Test Current
200 MΩ/250V	0.1 MΩ	±(3% of rdg + 5dpts)	250V+10%	1mA at 250KΩ load
200 MΩ/500V	0.1 MΩ		500V+10%	1mA at 500KΩ load
2000 MΩ/1000V	1 MΩ		1000V+10%	1mA at 1 MΩ load

OHMS

Range	Resolution	Accuracy	Max. Open Circuit Voltage	Overload Protection
200 Ω	0.1 Ω	± (1% of rdg + 2dpts)	3.3V	500V DC/AC

Continuity Beeper ())))

Range	Resolution	Operation Resistance	Max. Open Circuit Voltage	Overload Protection
200 Ω	0.1 Ω	Resistance < 100Ω	3.3V	500V DC/AC

AC Voltage (40Hz~500Hz)

Range	Resolution	Accuracy	Input Impedance	Overload Protection
600 V	1 V	± (0.8% of rdg + 3dpts)	10 MΩ	750 Vrms



TES ELECTRICAL ELECTRONIC CORP.

No. 57 Jen-Ai Road, Sec.2, Taipei, Taiwan.

Tel : (02) 2393-9142 Fax : 886-2-2395-9146

E-Mail: tes@ms9.hinet.net <http://www.tes.com.tw>