



PROVA[®]

123 Process Calibrator

- 4-20mA (1K Ω load, 24V Loop Supply)
- 0-100.00mV, 0-1.0000V, 0-12.000V
- K, J, E, T Type Thermocouples ($^{\circ}$ C and $^{\circ}$ F)
- Frequency 1-62500 Hz
- Easy Key-pad Operation, Easy Step, and Auto Ramp

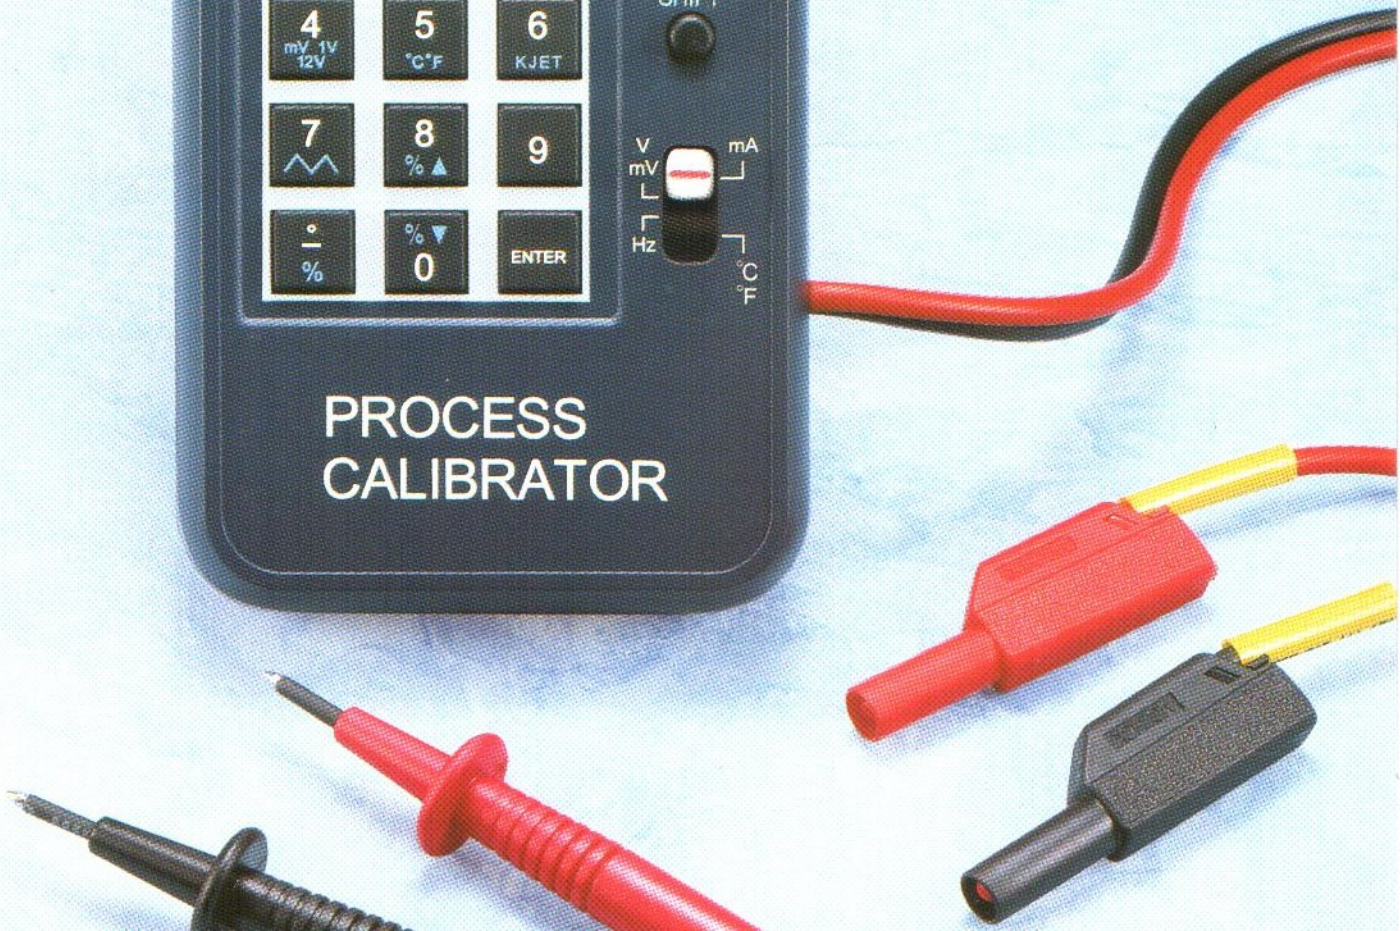

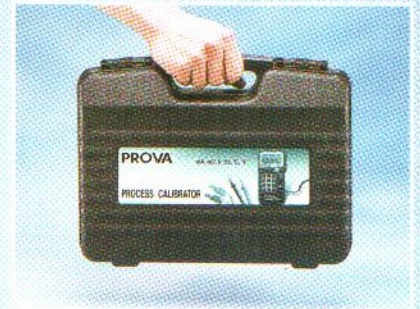

PROVA 123 Multifunction Calibrator

Electrical Specifications: (23°C±5°C)

mA DC Current:

(1K Ω Max. Load, 24V Loop Supply)

Range	Resolution	Accuracy
4 - 20mA, 0 - 20mA, 0 -24 mA	1 μ A	\pm 0.025% \pm 3 μ A

Beeper warning when output is open and specified output > 1mA

mV, V DC Voltage:

(1mA Supply Current)

Range	Resolution	Accuracy
0 - 100.00mV	10 μ V	\pm 0.05% \pm 30 μ V
0 - 10.000V	1mV	\pm 0.05% \pm 3mV
0 - 1.0000V	100 μ V	\pm 0.05% \pm 300 μ V

Beeper warning when output is short and specified voltage output > 10mV

Frequency:

(1 - 125Hz, 1K Ω Load Min.)

Range	Resolution	Accuracy
1 - 125 Hz	1 Hz	\pm 0.04Hz

K, J, E, T type Thermocouples:

(1°C, 1°F Resolution, 1K Ω Load Min.)

Range	Accuracy	Range	Accuracy
K: -200 to 0 °C	\pm 1.1°C	K: -328 to 32°F	\pm 2.0°F
K: 0 to 1370 °C	\pm 0.8°C	K: 32 to 2400°F	\pm 1.5°F
J: -100 to 0 °C	\pm 0.9°C	J: -148 to 32°F	\pm 1.6°F
J: 0 to 760 °C	\pm 0.7°C	J: 32 to 1400°F	\pm 1.2°F
E: -100 to 0 °C	\pm 0.9°C	E: -148 to 32°F	\pm 1.6°F
E: 0 to 700 °C	\pm 0.7°C	E: 32 to 1292°F	\pm 1.2°F
T: -200 to 0 °C	\pm 1.0°C	T: -328 to 32°F	\pm 1.8°F
T: 0 to 400 °C	\pm 0.8°C	T: 32 to 752°F	\pm 1.5°F

General Specifications:

Dimension:	88 x 168 x 26 mm (3.46" x 6.61" x 1.03")
Battery Type:	9V Alkaline Battery
Display:	4+ 5 Digits
Power Consumption:	60mA - 180mA
Operating Temperature:	0°C to 50°C (32°F to 122°F)
Operating Humidity:	less than 85% relative
Storage Temperature:	-20°C to 60°C (-4°F to 140°F)
Storage Humidity:	less than 85% relative
Weight:	330g / 11.63 oz
Accessories:	Carrying case x 1 Users Manual x 1 External Battery Pack: 1.5V AA Batteries x 6 9V Alkaline Battery x 1 Alligator clip x 1 K type thermocouple connector Test leads

PROVA[®] **PROVA INSTRUMENTS INC.**

Add: 6F-2, #129, Lane 235, Pao-Chiao Road,
Shin-Tien, Taipei Hsien 231, Taiwan

Tel: 886-2-89191255

Fax: 886-2-89191489

E-mail: prova@ms3.hinet.net