

tyco


Electronics

Energy Division

Heat-Shrinkable Termination System for Cables up to 36 kV

Features:

- Universal termination family for 12-36 kV based on SCTM stress control technology
- All applications for polymeric and MIND paper on 1-core, 3-core, armoured and unarmoured cables
- Red non-tracking HVOT tubing provides excellent environmental protection
- Can be used in combination with RICS / RCAB / RSRB switchgear connection systems

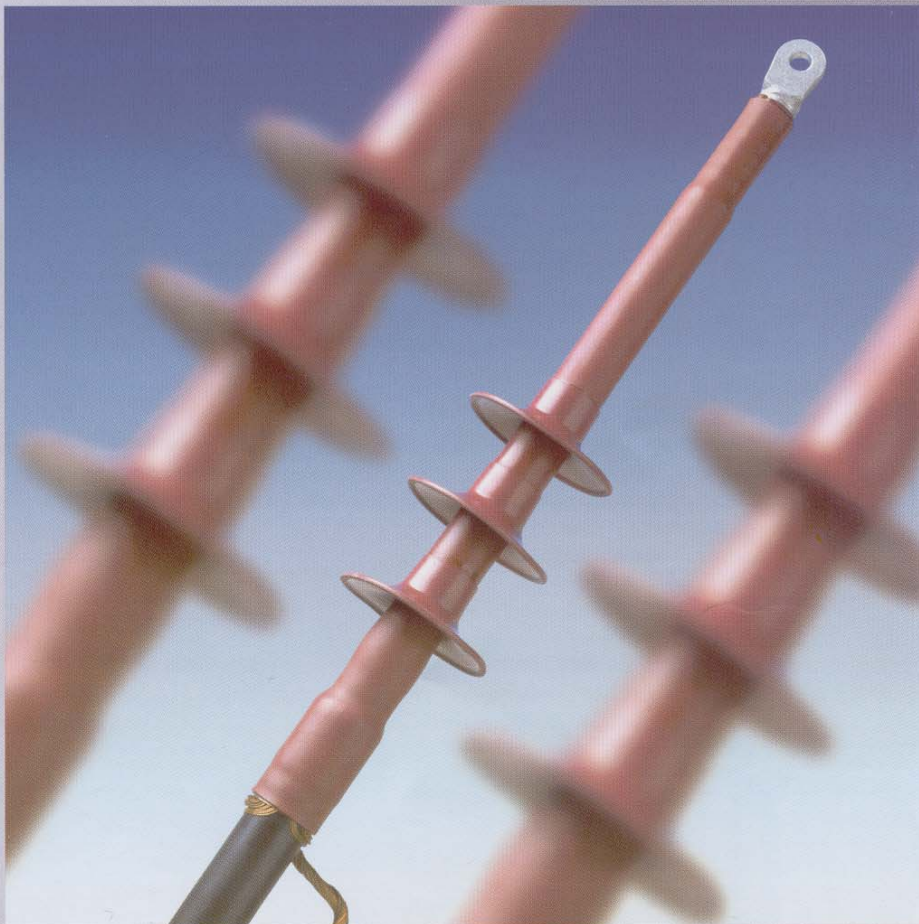

PARS DJULFA CO.

No. 11 Shahid Mirza -
Hassani st. , Ghaem -
Maghame Farahani Ave.
Postal Code 15867
TEHRAN - IRAN
Tel: 8720520
Fax: 8723450

شرکت پارس جلفا

تهران،
خیابان قائم مقام فراهانی
کوچه شهید میرزا حسینی،
پلاک ۱۱ کدپستی: ۱۵۸۶۷
تلفن: ۸۷۲۰۵۲۰
فاکس: ۸۷۲۳۴۵۰

Raychem

The Universal Medium Voltage Termination System for Polymeric and Paper Insulated Cables

Over the last three decades, engineers in utilities and industry around the world have specified of million's Raychem cable terminations at distribution voltages up to 36 kV. Raychem terminations have become identified with reliability because of their unparalleled long-term performance – where it really counts – in the field. Today there are many changes influencing the distribution of power at medium voltages. For example, the transition to new types of polymeric cable, distribution at higher voltages, and the widespread usage of compact switchgear.

Anticipating these industry changes, we have continued to extend and improve the product range, based on the extensive experience both in the field and at our outdoor test sites in coastal, polluted and desert environments. Now these developments are incorporated in a new generation of Raychem heat-shrinkable cable terminations, that are even easier to select and install, without compromising the reliability of proven materials technology. The improved system is simpler to use, because the basic termination components and installation steps are the same – even if your network operates with voltages of 7.2 to 36 kV; if you use 12 kV belted paper cable and 24 kV water-blocked single core polymeric cable; whether you make equipment connections in a cable box or in compact switchgear. Let's review the main advantages of the improved system:

Universal Selection Procedure

- Simplified selection table allows quick selection based on conductor cross section and voltage class for either polymeric or MIND paper insulated cables (For MI draining oil cables, contact your local representative)
- Simple modification codes permit easy specification of optional accessory kits
- Enhanced range-taking ability means that one kit fits more conductor sizes, reducing stocking requirements
- Unlimited shelf life allows stocking of economic quantities without product spoilage

Simplified Cable Preparation

- Improved treatment of screen cut back is compatible with all modern screen removal techniques
- No tapering of insulation required
- No polishing of polymeric insulation surface
- No special preparation of sector, or eccentric conductors, or of cable that is curved after unreeling from the cable drum
- Cable preparation steps are similar to those for Raychem joints

Simplified Installation

- Components are lightweight and non-shattering
- Clear instruction sheets
- Common installation procedure for polymeric and MIND paper cables
- Factory engineered kit permits rapid on-site installation
- No mechanical stress at insulation screen cutback
- Termination accommodates same bending radius as cable
- Visual confirmation of correct assembly sequence possible after installation
- Rain skirts can be installed to allow either top or bottom feed
- No soldering of earthing accessories required

Outstanding Long-Term Reliability

- Fully sealed against water ingress from the environment or from within the conductor strands
- Polymeric materials load cycle with the cable without mechanically stressing termination components and sealants
- Unsurpassed performance in polluted environments, proven over three decades.

Raychem Cuxhaven, West Germany, long-term test site. Raychem terminations have been on test at this North Sea coast location for over two decades.




Single Core Cable Termination System



**Polymeric Insulated Cable
Indoor Service**

- void filling compound
- stress control tubing
- non-tracking sleeve with sealant layer


It's the same system for all types of polymeric cable

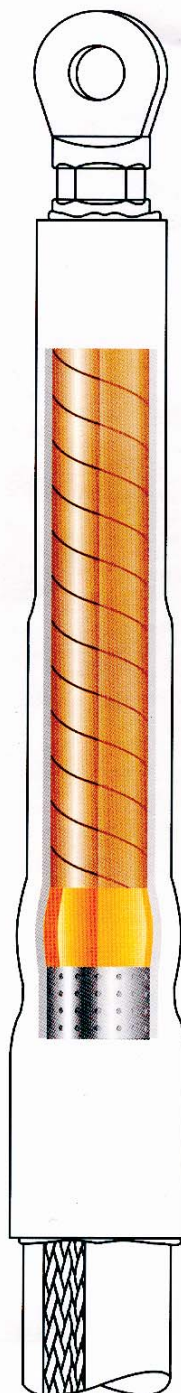

**Paper Insulated Cable
(Mass Impregnated, Non-Draining)
Indoor Service**

- oil barrier, insulating tubing (clear)
installed over paper insulation

otherwise, installation is the same as for a polymeric insulated cable

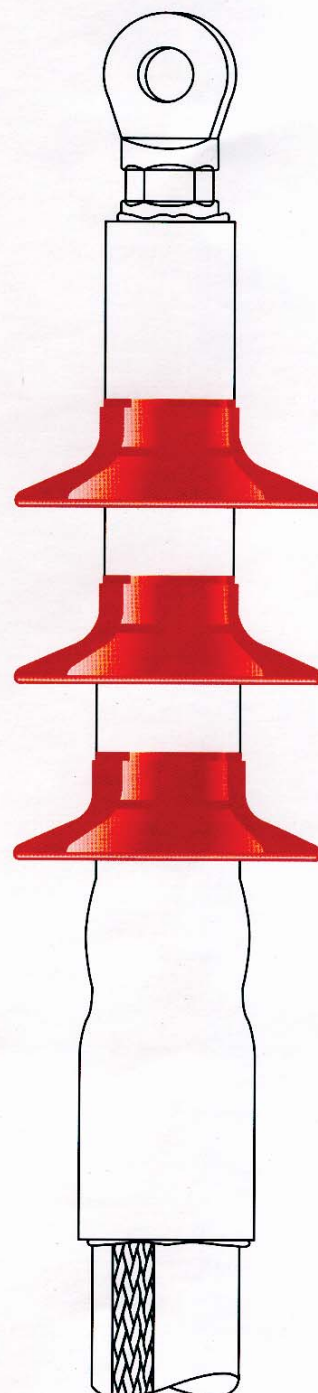


**Polymeric or Paper Insulated
Cable Outdoor Service**

- rain skirts installed over non-tracking sleeve

otherwise, installation is the same as for an indoor termination

Three-Core Cable Termination System

Polymeric or Papier Insulated Cable Indoor or Outdoor Service


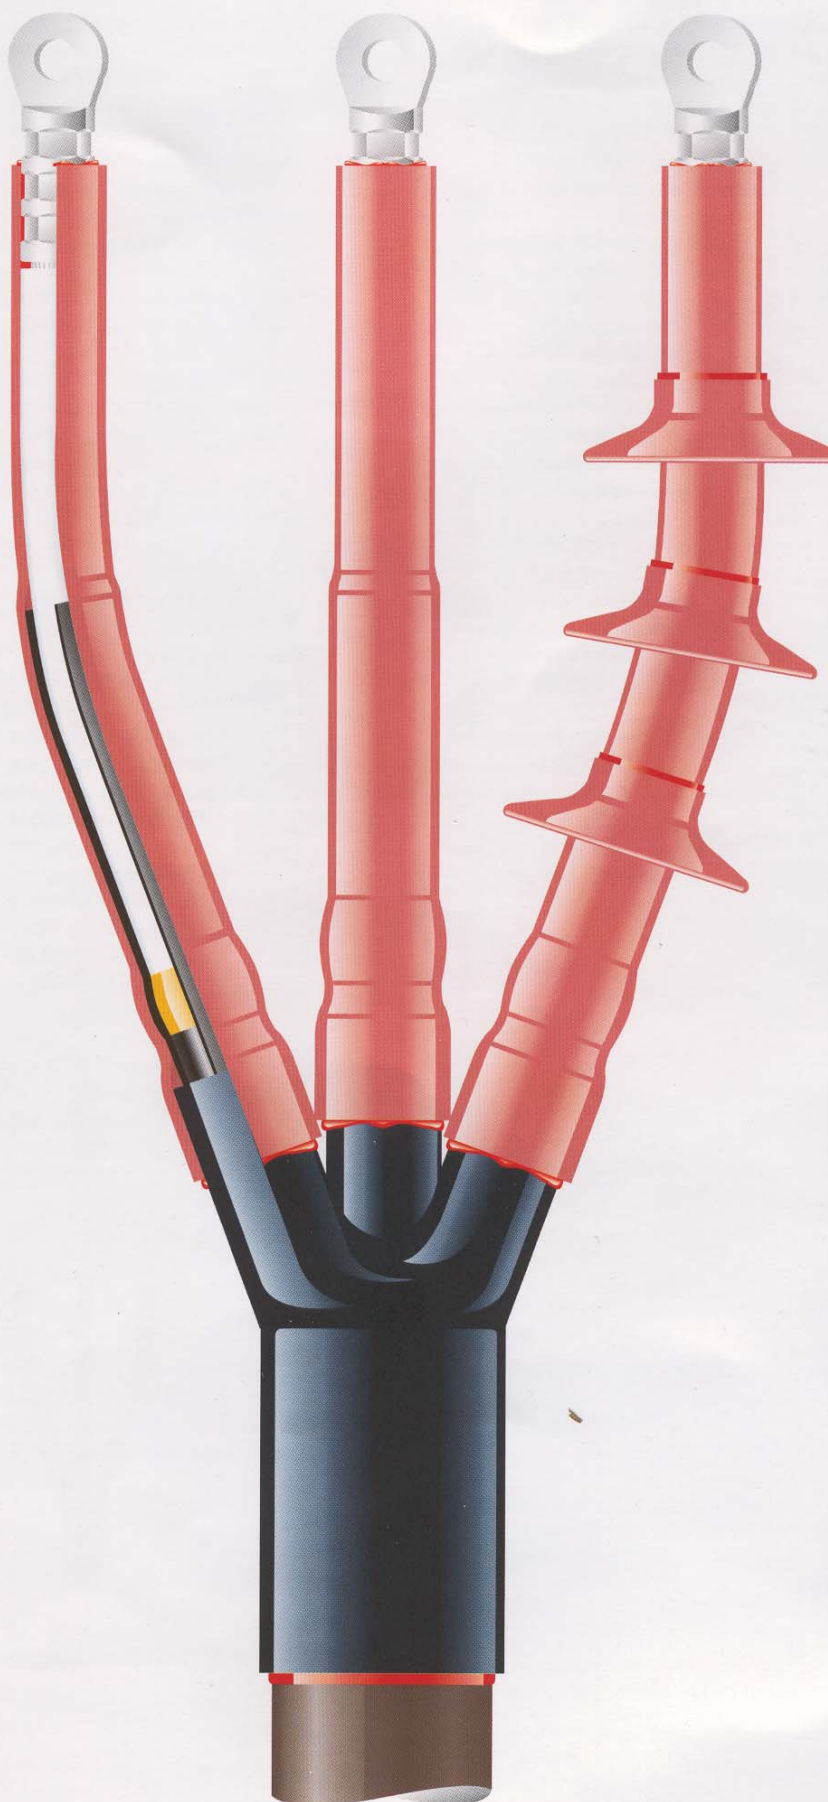


■ three-core breakout installed at end of cable oversheath

otherwise, installation steps are the same as for three single core terminations

The Raychem termination system is compatible with all types of armoured cable.

The system includes a complete range of solderless accessories for earthing insulation screens and cable armour and for grounding lead sheaths. Also available are insulators and support brackets, insulating boots for equipment connections and glands for easy entry to cable boxes. For more details please refer to the EPKT and IXSU Termination Systems Designer brochure.





All our indoor terminations for polymeric or paper insulated cables can be used with RICS (Raychem Insulated Connection System). The RICS, fully insulated, right-angle and straight adaptors make it easy to connect any type of cable to modern compact electrical equipment. A special RICS, accommodating a ZnO Surge Arrester is now available as well as a low profile, one piece cable termination (IXSU), designed specifically for applications with very limited clearances between phases.

We have the universal jointing system for all types of paper and polymeric cable up to 36 kV. The same system allows transition joints between different tree-core paper cable and transitions from paper to polymeric cables. Trifurcations with any combination of cables are also easy with the Raychem jointing system.

For more information about joints and terminations up to 72 kV and other problem-solving products, call your local representative. We have field sales offices and offer technical support around the world.



All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct and reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance of any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for these products is set forth in our standard terms and conditions of sale.

ALR, AMP, AXICOM, B&H, Bowthorpe EMP, Critchley, Crompton, Dorman Smith, Dulmison, Guro, Hellstern, La Prairie, Morlynn, Raychem, and SIMEL are trademarks.

tyco

Electronics

Energy Division



AMP

AXICOM



Bowthorpe EMP



Hellstern



MORLYNN

Raychem SIMEL

Argentina

Phone: ++54-11-4733 2277

Fax: ++54-11-4733 2267

Australia

Phone: ++61-2-4390 1111

Fax: ++61-2-4353 2497

Brazil

Phone: ++55-11-3611 1862

Fax: ++55-11-3611 2457

Canada

Phone: ++1-905-475 6222

Fax: ++1-905-470-4453

France

Phone: ++33-3-80583200

Fax: ++33-3-80341015

Mexico

Phone: ++52-5-729 0405

Fax: ++52-5-361-8545

Thailand

Phone: ++66-2-7394026 - 32

Fax: ++66-2-3260563 - 64

United States of America

Phone: ++1-800-327-6996

Fax: ++1-800-527-8350

United Kingdom

Phone: ++44-1772-325400

Fax: ++44-1772-726276

**Tyco Electronics Raychem GmbH
Energy Division**

Haidgraben 6, 85521 Ottobrunn/Munich, Germany

Phone: ++49-89-6089-0, Fax: ++49-89-6096345

<http://energy.tycoelectronics.com>